

Plant Risk Assessment

Electric and Diesel-powered Scissor lift

Address: 39 Alta Road Caboolture Qld 4510

Email: Serviceadmin@sinoboomaustralia.com.au

Phone Number: 03 8905 1550

Make:	SINOBOOM	Model:	0610ET, 0407EN, 0607EN, 0608ME, 0808E, 0812E, 1012E, 1212E, 1414E 1018RD, 1018RE, 1218RD, 1323RD, 1323RE, 1623RD, 1623RE
Plant Description:	Electric & Diesel powered Scissor Lift type Elevated Work Platform (EWP)		
Assessment completed by:	Sinoboom Australia	Department:	Technical Department
Revision Date:	29 th September 2026		

Licences or Competency Required:	Verification of competency required: - EWPA Yellow Card – EWP type SL or, - RIIHAN301E Operate Elevated Work Platforms (or equivalent)		
Training / Competencies Required for maintenance	Training and competence required for inspection of this plant include: - Has acquired, through training qualifications or experience, the necessary skills to inspect, maintain and repair the plant and - Has a sound knowledge of, and competence in the operation, maintenance, repair, alteration and dismantle of the plant and - Has sound knowledge of relevant Australian Standards, relevant Codes of Practice and other relevant legislation.		
Occupational Health, Safety or Environmental Legislation:	- Work Health and Safety Act 2011 - Work Health and Safety Regulations 2011	Codes or Standards Applicable to the equipment	- AS1418.10 - AS2550.10



Plant Risk Assessment – Electric and Diesel Scissor Lift

RISK MATRIX

LIKELIHOOD		CONSEQUENCE	SAFETY / PEOPLE	ENVIRONMENT / PLANT / EQUIPMENT
Rare - 1	The event may occur only in exceptional circumstances	Insignificant – 1	No medical treatment other than first aid required and no lost time injury.	No lasting detrimental effect on the environment. Insignificant damage less than \$1000
Unlikely - 2	Could occur at some time / the event is not expected to occur	Minor – 2	Medically treated injury.	Short term, local detrimental effect on the environment or social impact. Plant, property or equipment damage less than \$10,000 and no disruption to business
Moderate - 3	The event may occur	Moderate - 3	Lost time injury without being admitted to a hospital.	Serious environmental event (discharge of pollution) requires remedial action. Breach of environmental law. No long-term impact on environment. Plant, property or equipment damage less than \$100,000 and minimal disruption to business
Likely - 4	Likely to occur at some time / the event will probably occur	Major - 4	Lost time injury resulting in being admitted to hospital with the ability to return to work after treatments.	Any of the above, with the potential for long-term environmental or social impact. Plant, property or equipment damage less than \$1,000,000, major disruption to business
Almost Certain - 5	Has or likely to occur weekly	Extreme - 5	Fatality, permanent disability or multiple serious injuries to staff, contractors or public.	Extensive and long-term impacts on the environment and community. Plant, property or equipment damage more than \$1,000,000, major disruption to business i.e. sites shut down

Consequence

	1 Insign.	2 Minor	3 Mod.	4 Major	5 Extrem e
1 Rare	1	2	3	4	5
2 Unlikely	2	4	6	8	10
3 Moderat e	3	6	9	12	15
4 Likely	4	8	12	16	20
5 Almost certain	5	10	15	20	25


Likelihood

RISK LEVELS

Low (1-3) Works shall be monitored by supervisor. Any risk assessed as presenting a low risk level will be permitted to be controlled using a combination of controls as appropriate, more than one lower-level control must be applied if elimination and or engineering controls are not practicable	Medium (4 – 8) Works shall be monitored by senior management. Any risk assessed as presenting high or medium risk level will only be allowed to be controlled using a combination of at least one engineering control and one lower level controls as appropriate	High (9 – 14) No works to commence unless otherwise approved by Senior Management. Any risk assessed as presenting high or medium risk level will only be allowed to be controlled using a combination of at least one engineering control and one lower level controls as appropriate	Extreme (15 – 25) No works to commence unless otherwise authorised by the Director. Any risk assessed presenting extreme risk level will only be allowed to be controlled using elimination and or engineering controls as the primary source of controls. The activity MUST be signed off by director or project manager before proceeding
--	---	--	--

HIERARCHY OF CONTROLS

ELIMINATE	Can we eliminate or remove the hazard completely?
SUBSTITUTE	Can we substitute the hazard with something else less dangerous?
ENGINEER / ISOLATION	Can we re-design or isolate the hazard completely?
ADMINISTRATION	What controls can we put in place, e.g. training, job rotation, supervision?
PPE	What personal protective equipment is required to undertake this activity?

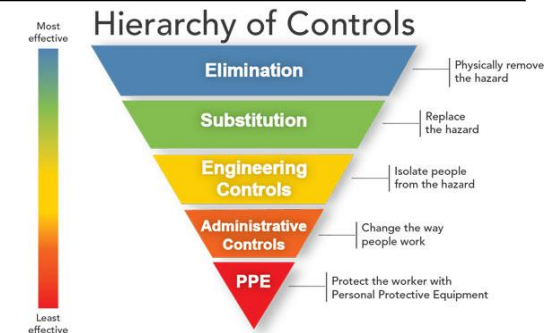

Plant Risk Assessment – Electric and Diesel Scissor Lift

SN	HAZARD TYPE	HAZARD DISCRIPTION	RISK RATING			CONTROL MEASURE BY MANUFACTURER	RESPONSIBLE PERSONNEL	RESIDUAL RISK		
			L	C	R			L	C	R
A	GENERAL									
1	Crushing	Operating in a high movement area or in an enclosed environment. Potential crush and collision during lifting or travelling.	3	4	12	- The machine has motion alarm and a flashing, emitting audible and visual warning. - Select to low drive speed if available. - Have a spotter/guide when traffic is high with people & machinery movements.	OPERATOR	1	4	4
2	Entanglement	Loose wiring and hoses. Rotating parts (motor, engine flywheel and fan). Loose clothing and accessories.	1	4	4	- All wires and hoses are safe and fixed at specific locations, and the charger cable is shortest. - No rotating parts is exposed outside the machine. Flywheels and fans of both motor and engine are enclosed in their own compartments and thus are accessible only with special tools and repaired only by qualified personnel. - In addition, warning signs are posted on the machine. Always wear proper & just fit clothing, no accessories like bangle, chain, bracelet, vendetta, scarf etc. - Operator to ensure all loose items are secure before operation, perform walk around inspection	OPERATOR	1	2	2
3	Cutting	Sharp edges, rusty area,	3	5	15	- All contact surfaces are free of any sharp edges. - All handrail edges are smooth and painted well against rusting.	OPERATOR	1	4	4
4	Puncturing.	Protruding bolt/screw/pins.	3	4	12	- All bolts, screws and pins are installed facing outside the platform. - All bolts, screws and pins on the chassis are installed facing inside.	OPERATOR	1	4	4
5	Shearing	Between scissor arms	3	5	15	- Guards are provided in accordance with plant code requirements for guarding. - Guarding provided is a fixed permanent nature and can only be removed with tools. - Follow maintenance procedures in the service manual, always use the maintenance bar provided. - Ensure no one near machine when operating, always sound horn before start lowering	OPERATOR	1	4	4

Plant Risk Assessment – Electric and Diesel Scissor Lift

SN	HAZARD TYPE	HAZARD DISRIPTION	RISK RATING			CONTROL MEASURE BY MANUFACTURER	RESPONSIBLE PERSONNEL	RESIDUAL RISK		
			L	C	R			L	C	R
6	Friction	Mechanical faults, Platform rising/lowering not smooth	3	1	3	- Friction-caused mechanical faults are reduced greatly with lubrication. Greasing points at cylinder ends. All other pins come with self-lubricating bushings. - The maintenance manual specifies the lubrication schedule and grease type for reference. - Always ensure sliding wear pad areas are always free of debris & clean to reduce friction.	OPERATOR	1	1	1
7	Striking	Sudden or unintended movements. Extension platform extended & lowering/driving.	2	2	4	- Enable switch provided to prevent inadvertent movement, no movement will work without first activating the enable switch. - Practice safe operation by retracting extension platform first before lowering/driving	OPERATOR	1	1	1
B	ERGONOMIC									
8	Tripping	Trip Hazard	3	3	9	Operational Manual stipulated “keep the platform floor free of obstacles”. Hold the handrail when moving in the platform.	OPERATOR	2	2	4
9	Falling	General operations. Falling when entering/exiting platform.	4	4	16	- Platform comes with safety rail to prevent operator falling off. - Safety lanyard anchor points provided for all operators. - Platform door is swing inward type & self-locking type, as specified by AS1418.10. For more, refer to Operational Manual "Falling Hazard". - Always practice 3 points contact. Always Enter head on & exit back down to avoid falling.	OPERATOR	2	2	4
10	Slipping	Slipping on the platform, slip on lubricant, water or wet material like cloth.	4	3	12	- Platform floor is of checkered pattern type to reduce slippage. - Always clear all spilt liquid in platform & surrounding area. - Always wear non-slip safety shoes.	OPERATOR	1	3	3

Plant Risk Assessment – **Electric and Diesel Scissor Lift**

SN	HAZARD TYPE	HAZARD DESCRIPTION	RISK RATING			CONTROL MEASURES BY MANUFACTURER	RESPONSIBLE PERSONNEL	RESIDUAL RISK			
			L	C	R			L	C	R	
C	EQUIPMENT SYSTEM										
11	High Pressure Fluid	High pressure fluid can cut or penetrate	4	4	16	- System is designed with relief valve & pressure-reducing valve sufficient for operation. - All hydraulic component & hoses are designed with sufficient safety margins. - Refer to Maintenance Manual for proper adjustment & repair.	OPERATOR	2	2	4	
12	High Temperature	Heat can burn or scald body skin.	3	5	15	- Do not open radiator cap when it is hot. - Do not check engine when it is hot. - Always wear PPE like gloves & goggles/face shield.	OPERATOR	2	1	2	
13	Fire/Explosion	During operating or charging the equipment. Combustible material not subjected to heat. During refuelling & spill of fuel.	3	4	12	- Maintenance Manual specifies the related warning: in open-flame or potential explosion environment, it is forbidden to use or charge the machine. - Do not touch any battery terminal with tools that may generate sparks. - Store & remove all combustible material from machine immediately. E.g. cloth/paper with stain lubricant, fuel, & dry debris which can catch fire easily. Especially area near engine/motor. - No open flame or smoking during refuelling, always clean up fuel spill asap.	OPERATOR	2	4	8	
14	Exhaust Gas	Working In a closed environment, Engine exhaust gas during operation.	4	4	16	- In a concealed environment, don't start or operate any machine with diesel engine. - Engine powered units are for outdoor use only, do not operate indoor.	OPERATOR	1	1	1	
15	Gas Emitted During Charging	Inhalation of gas	3	4	12	Only charge battery in a well-ventilated area, do not work in the same area where machine is charging.	OPERATOR	1	2	2	

Plant Risk Assessment – **Electric and Diesel Scissor Lift**

SN	HAZARD TYPE	HAZARD DISCRIPTION	RISK RATING			CONTROL MEASURES BY MANUFACTURER	RESPONSIBLE PERSONNEL	RESIDUAL RISK		
			L	C	R			L	C	R
D	ELECTRICAL									
16	Overload Electrical Circuit	System overload & caused fire.	3	3	9	- Power supply circuit has a minimum of 250A fuse, and control circuit has a minimum of 10A circuit breaker. - Besides, on the main positive circuit has main power-off/isolator switch. - Cables are designed to carry the electrical load.	OPERATOR	1	3	3
17	AC Electric Shock	Electrocution hazard.	3	5	15	- For standard equipment, the system voltage is below 24V DC. - For off-road equipment with diesel engine, the system voltage is below 14V DC. For off-road electric equipment, the system voltage is below 48V DC. 220V charger has power protection function by limiting the charging and emitting warning signal. Outside the platform handrail, the mains port has such functions as short circuit + overload + leakage protection (RCBO), at 230V of voltage, 16A of current and 5-10 In of electromagnetic tripping (C curve) (Selection of protective element is dependent on the corresponding areas.)	OPERATOR	1	3	3
18	Electrocution hazard	Damage to Components may occur due to strong electromagnetic interference. Electrocution hazard, serious injury or death.	4	5	20	- The vehicle is of non-insulated design and marked with non-insulated signs. - CAN BUS is of shielded twisted pair for data interaction. - Always practice minimum approach distance, always find out power line voltage before operating. Refer to operational manual and follow local regulatory requirements. - Utilize a qualified electrical spotter.	OPERATOR	2	5	10

Plant Risk Assessment – **Electric and Diesel Scissor Lift**

SN	HAZARD TYPE	HAZARD DESCRIPTION	RISK RATING			CONTROL MEASURES BY MANUFACTURER	RESPONSIBLE PERSONNEL	RESIDUAL RISK		
			L	C	R			L	C	R
E	STABILITY									
19	Uneven/Slope Ground	It is possible that the machine may tip over	3	5	15	- Nameplate and Operation Manual clearly specify the allowable inclination. - Above the inclination, the vehicle cannot be used. - With a level sensor, the machine can give out warning signal if tilted beyond the inclination, limiting some functions. - Dynamic test have been performed as per the standard.	OPERATOR	2	3	6
20	Outriggers	With outriggers not deployed, exceeding allowable height may tip over the vehicle.	2	5	10	- Platform height is limited with outriggers retracted, which is set in the program. - Manuals stipulate the precautions for outriggers not deployed.	OPERATOR	2	3	6
21	Drive: Pothole, Hitting Object	The vehicle may tip over in pothole or obstacles.	2	5	10	- Our products are designed and tested according to AS1418.10 standards. - Always practice worksite inspection before operation, mark out all pothole/object that cannot be removed.	OPERATOR	1	1	1
22	Safe Workload, Side Load	Excessive side load than the specified side load can cause the vehicle to tip over.	4	5	20	- Our products are designed and tested according to AS1418.10 standards. - Rated to 400N according to AS1418.10. - The safe workload and side load requirements are on the safety signs. - Manuals also list the safety workload and side load requirements.	OPERATOR	2	4	8
23	Wind Rating Indoor/Outdoor	Above the specified wind speed, the vehicle may tip over.	3	5	15	- Safety signs stated max allowable wind speeds for indoor and outdoor products. - Manuals also specify the maximum allowable wind speed, as well as the applicable indoor/outdoor models. - Rated to 12.5 M/S as per AS1418.10 - Always ensure unit is for indoor or outdoor application.	OPERATOR	2	1	2
24	Over-speeding	Above allowable traveling speed, the vehicle may roll over.	2	5	10	- Traveling speed has been limited in the control system. - Do not adjust travel speed higher than spec. Always be aware of travel ground & surrounding condition.	OPERATOR	1	1	1

Plant Risk Assessment – Electric and Diesel Scissor Lift

SN	HAZARD TYPE	HAZARD DESCRIPTION	RISK RATING			CONTROL MEASURES BY MANUFACTURER	RESPONSIBLE PERSONNEL	RESIDUAL RISK		
			L	C	R			L	C	R
F	HYDRAULIC FAILURE									
25	Hose Failure	High pressure fluid can cut or penetrate skin	3	4	12	- Hoses are built to exceed the safety standards defined in AS1418.10. - Besides, at the friction parts of hoses are mounted sheathes for protection. - There are relief valves installed to limit the system pressure. - Always de-pressurize the system before maintenance, refer to Maintenance Manual.	OPERATOR	2	2	4
26	Cylinder Failure	Cylinder piston rod is bent. Unit self-lowered uncontrol, tip over.	2	3	6	- Main seals are manufactured in accordance with standards set in AS1418.10. - The anti-bending stability coefficient of cylinders are designed in accordance to AS1418.10. - Check & test unit prior operation, do not use unit if abnormality detected in any cylinders	OPERATOR	1	1	1
27	Hydraulic Component Failure	The work platform lowers by itself. Unit become inoperable at critical position.	2	4	8	- Component used are of high quality which meet international standards. - Filters are designed to reduce foreign materials. - Descending valve has manual control function for emergency lowering operation	OPERATOR	1	2	2
G	STRUCTURAL FAILURE									
28	Scissors Arm Fatigue/Corrosion	Fatigue and corrosion can cause fracture on scissor arms. Scissors arm failure will cause platform to collapse from height.	1	5	5	- Scissor arms are manufactured in accordance with AS1418.10 with sufficient safety margins. - Surfaces are well painted to minimize corrosion, with maintenance intervals shown in manuals. - Visual inspection prior operation, rectify fault before used.	OPERATOR	1	1	1
29	Pin, Bushing, Linkages	Platform collapse or breakdown in critical position.	2	5	10	- Pins, bushing and linkages are built in accordance with AS1418.10 - Manuals specify the periodic maintenance and inspection.	OPERATOR	2	1	2
30	Overloading	Overloading can cause the scissor to collapse	3	5	15	- Scissor have load sensors installed which prevent operation when the scissor is over the weight limit. - Safety sign shows the max. rated load, and so do manuals.	OPERATOR	2	1	2

Plant Risk Assessment – Electric and Diesel Scissor Lift

SN	HAZARD TYPE	HAZARD DESCRIPTION	RISK RATING			CONTROL MEASURES BY MANUFACTURER	RESPONSIBLE PERSONNEL	RESIDUAL RISK			
			L	C	R			L	C	R	
H	MAINTENANCE										
31	Scissor Arms, Extension Platform	Erratic movement, breakdown in critical position	2	3	6	Check & ensure periodically maintenance are perform & machine works normally prior start work Maintenance Manual stipulates component & inspection/maintenance interval.	OPERATOR	1	1	1	
32	Battery Short Pos & Neg Terminal	Potentially fire & explosion, system totally not functioning at critical position	2	3	6	Check unit prior operation for proper cleanliness, battery terminals are tight, rubber covered properly, no foreign object that can cause short circuit, no spilled battery water or other fluid.	OPERATOR	2	1	2	
33	Pressurized Hydraulic System	High pressure fluid can cut or penetrate skin. Erratic movement, breakdown in critical position.	4	4	16	- Periodically check all relief pressure setting, regularly change filters & hydraulic oil as specified in Maintenance manual. - Release residual pressure during maintenance. - Replace hoses when the outer layer is worn out even it does not leak to prevent sudden burst of hose due to its strength is compromised.	OPERATOR	2	1	2	
34	Battery Fluid Acid	Corrosion on component & burn the skin.	3	4	12	- Standard maintenance-free battery, less chance of handling of acid or leaks or spilt its electrolyte. - Always wear rubber glove & goggles when handling battery acid/electrolyte.	OPERATOR	1	1	1	
I	TRANSPORT										
35	On Trailer-Tie down Points	Machine roll off trailer during transport.	4	4	16	- Tie-down points are provided in the machine. - Ensure proper tie down method is done & with sufficient capacity of tie down material. - Refer to the Manuals.	OPERATOR	1	1	1	
36	Hoisting- Lifting Point	Machine tilt off balance & fall while hoisting.	2	3	6	- Ensure hoisting material are proper length, sufficient capacity & latch to specific hoisting points. - Refer to lifting procedure in operators manual.	OPERATOR	1	1	1	
37	Loading/ Unloading	Machine slip & fall at ramp	4	3	12	- Ensure ramp is not wet, drive at low-speed high torque. - Use of sufficient winch. - Have spotter on the ground if from the platform the ramp cannot be seen clearly. - Licenced and trained operator.	OPERATOR	2	1	2	

Plant Risk Assessment – **Electric and Diesel Scissor Lift**

SN	HAZARD TYPE	HAZARD DESCRIPTION	RISK RATING			CONTROL MEASURES BY MANUFACTURER	RESPONSIBLE PERSONNEL	RESIDUAL RISK		
			L	C	R			L	C	R
J	OCCUPATIONAL HAZZARD									
38	Unauthorized Use	General operations. Accident resulting in injury/fatality & damaged to property & machine.	4	5	20	- Only one controller can be used at one time. - Ground controllers are recessed to prevent against accidental operation. - Detachable key switch to prevent unauthorized operation. - Lockable battery isolators are installed to isolate the machine. - Only allow trained operator to use the machine.	OPERATOR	1	1	1
39	Emergency Lowering	Platform not able to lower at critical height.	2	2	4	- Emergency lowering procedure is on the chassis. - Always check emergency lowering prior start of work, ensure people nearby know how to perform emergency lowering. - Do not operate equipment alone. - Refer Operation Manual.	OPERATOR	1	1	1
40	Safety Sign & Label	Decal Removed / Wrong decal(s) Wrong operation resulting in accident.	2	5	10	- Warning signs are permanent, waterproof and conspicuous. - The nameplate specifications are stamped, and permanently valid. - All safety warning signs are illustrated in Operation Manual. - Ensure all sign & label are readable & in proper location, replace immediately prior work start.	OPERATOR	2	1	2

Plant Risk Assessment – **Electric and Diesel Scissor Lift**

Workers Acknowledgement

I acknowledge that I have been trained in the Plant Risk Assessment listed above, the controls are clearly understood, and my qualifications are current to undertake this activity. I will comply with the Plant Risk Assessment, and I have been consulted and had the opportunity to contribute to the Plant Risk Assessment. If at any stage I feel I cannot conduct my task/s safely, I will stop work immediately and report the issue to the relevant supervisor.

Print Name	Position / Trade	Signature:	Date

	Plant Risk Assessment – Electric and Diesel Scissor Lift
--	---

--	--	--	--